


EPS División sellos mecánicos

Dibujo del sello: IT2



Sello mecánico tipo: IT-2

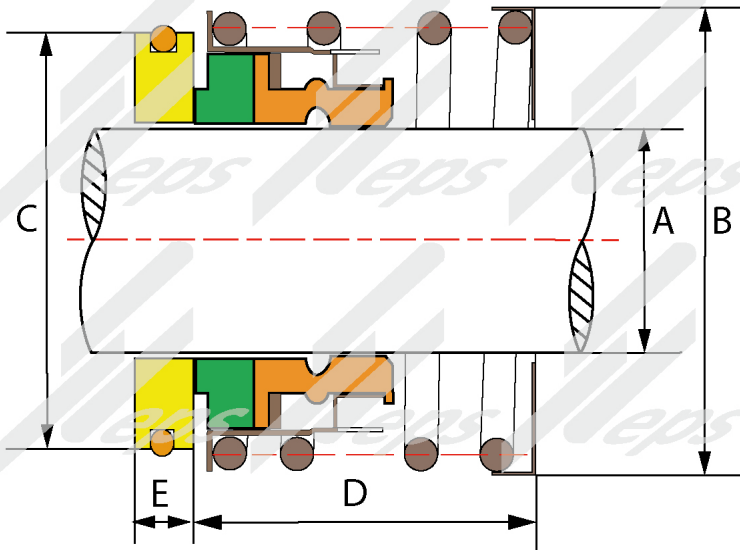

Dimensiones: IT-2

| Diam. flecha A | B | C | D | E | Modelo |
|-------------------|-------|-------|-------|------|-----------|
| 5/8" | 17.32 | 35.0 | 24.6 | 25.0 | EPSIT258 |
| 3/4" | 19.05 | 40.0 | 27.8 | 25.0 | EPSIT234 |
| 7/8" | 23.51 | 43.0 | 30.9 | 25.0 | EPSIT278 |
| 1" | 25.40 | 46.0 | 41.3 | 25.4 | EPSIT2100 |
| 1 1/8" | 28.57 | 49.2 | 44.5 | 27.0 | EPSIT2118 |
| 1 1/4" | 31.77 | 52.4 | 47.6 | 27.0 | EPSIT2114 |
| 1 3/8" | 36.34 | 57.2 | 50.8 | 28.6 | EPSIT2138 |
| 1 1/2" | 38.10 | 60.3 | 54.0 | 28.6 | EPSIT2112 |
| 1 5/8" | 41.27 | 69.0 | 60.3 | 34.9 | EPSIT2158 |
| 1 3/4" | 44.45 | 69.9 | 63.5 | 34.9 | EPSIT2134 |
| 1 7/8" | 47.62 | 73.0 | 66.7 | 38.1 | EPSIT2178 |
| 2" | 50.80 | 76.2 | 69.9 | 38.1 | EPSIT2200 |
| 2 1/8" | 53.97 | 82.5 | 76.2 | 42.9 | EPSIT2118 |
| 2 1/4" | 57.15 | 85.7 | 79.4 | 42.9 | EPSIT2214 |
| 2 3/8" | 60.32 | 88.9 | 82.6 | 46.0 | EPSIT2238 |
| 2 1/2" | 63.50 | 94.0 | 85.7 | 46.0 | EPSIT2212 |
| 3" | 76.20 | 107.9 | 98.4 | 52.4 | EPSIT2300 |
| 4" | 101.6 | 141.3 | 123.8 | 58.7 | EPSIT2400 |

*Medidas en mm

Aplicación:

Para bombas centrífugas de mediana presión.

Presión: < 2.8Mpa, 406 PSI.

Temperatura:

Nitrilo: -20 a +120°C.

Vitón: -30 a + 210°C.

Velocidad: < 13 m/seg.

Configuración:

- Estacionaria: Cerámica/Silicio
- Rotativa: Carbón/Silicio
- Elastomeros: Nitrilo/Vitón.
- Partes metálicas: Acero inox 304.

