


EPS División sellos mecánicos

Dibujo de sello: Tipo IT9

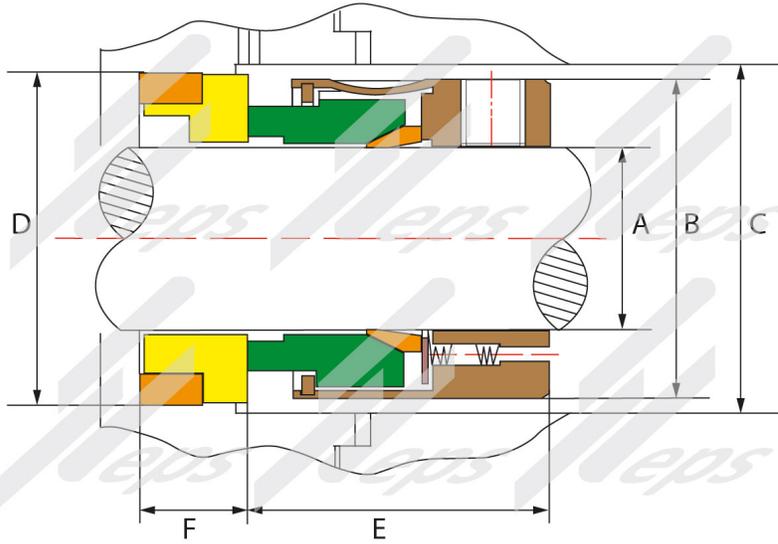

Configuración:

- Rotativa: Carbón/Silicio.
- Estacionaria: Cerámica/silicio.
- Elastómeros: Teflon.
- Resorte y partes metálicas: Ac. inox. 304.

Medidas:

Sello Tipo IT9

Diam. de flecha A	B	C	D	E	F	Modelo
1/2"	26.7	29	25.4	20.6	8.0	IT912CASICTF
5/8"	30.7	34	31.8	19.0	10.3	IT958CASICTF
3/4"	34.0	37	34.9	22.2	10.3	IT934CASICTF
7/8"	37.2	40	38.1	23.8	10.3	IT978CASICTF
1 "	40.3	43	41.3	25.4	11.1	IT9100CASICTF
1 1/8"	43.5	46	44.5	27.0	11.1	IT9118CASICTF
1 1/4"	48.3	51	47.6	27.0	11.1	IT9114CASICTF
1 3/8"	51.5	54	50.8	28.6	11.1	IT9138CASICTF
1 1/2"	54.6	58	54.0	28.6	11.1	IT9112CASICTF
1 5/8"	61.0	64	60.3	35.0	12.7	IT9158CASICTF
1 3/4"	64.2	67	63.5	35.0	12.7	IT9134CASICTF
1 7/8"	67.3	70	66.7	35.0	12.7	IT9178CASICTF
2"	70.5	73	69.9	35.0	12.7	IT9200CASICTF

*Medidas en mm

Sello mecánico Tipo IT9



Aplicación:

- Sello mecánico multiresorte, para aplicaciones de bombas de proceso.
- Presión: 1.7 Mpa, 246PSI.
- Temperatura:
Telfon: -30 a +200°C.
- Velocidad: 25 m/s.

EPS División sellos mecánicos

Sello mecánico Tipo IT9

Continuación de medidas:

Sello Tipo IT9						
Diam. de flecha A	B	C	D	E	F	Modelo
2 1/8"	76.9	80	76.2	43.0	14.3	IT9218CASICTF
2 1/4"	80.0	83	79.4	43.0	14.3	IT9214CASICTF
2 3/8"	83.2	86	82.6	43.0	14.3	IT9238CASICTF
2 1/2"	86.4	89	85.7	43.0	14.3	IT9212CASICTF
2 5/8"	89.6	92	85.7	43.0	15.9	IT9258CASICTF
2 3/4"	92.7	96	88.9	43.0	15.9	IT9234CASICTF
2 7/8"	95.9	99	95.3	43.0	15.9	IT9278CASICTF
3"	97.5	100	98.4	43.0	15.9	IT9300CASICTF
3 1/8"	100.7	104	101.6	43.0	19.8	IT9318CASICTF
3 1/4"	105.4	108	104.8	43.0	19.8	IT9314CASICTF
3 3/8"	108.6	111	108.0	43.0	19.8	IT9338CASICTF
3 1/2"	111.8	115	111.1	43.0	19.8	IT9312CASICTF
3 5/8"	115.0	118	114.3	43.0	19.8	IT9358CASICTF
3 3/4"	118.1	121	117.5	43.0	19.8	IT9334CASICTF
3 7/8"	121.3	124	120.7	43.0	19.8	IT9378CASICTF
4"	124.5	127	123.8	43.0	19.8	IT9400CASICTF
4 1/8"	127.0	131	130.2	43.0	19.8	IT9418CASICTF
4 1/4"	130.8	134	133.4	43.0	19.8	IT9414CASICTF
4 3/8"	134.0	137	136.5	43.0	19.8	IT9438CASICTF
4 1/2"	137.2	140	139.7	43.0	19.8	IT9412CASICTF
4 5/8"	149.9	153	142.9	51.0	19.8	IT9458CASICTF
4 3/4"	153.1	156	146.1	51.0	19.8	IT9434CASICTF
4 7/8"	156.2	159	149.2	51.0	19.8	IT9478CASICTF
5"	159.4	165	152.4	51.0	19.8	IT9500CASICTF

*Medidas en mm

