


# EPS División sellos mecánicos

## Dibujo de sello: Tipo 03

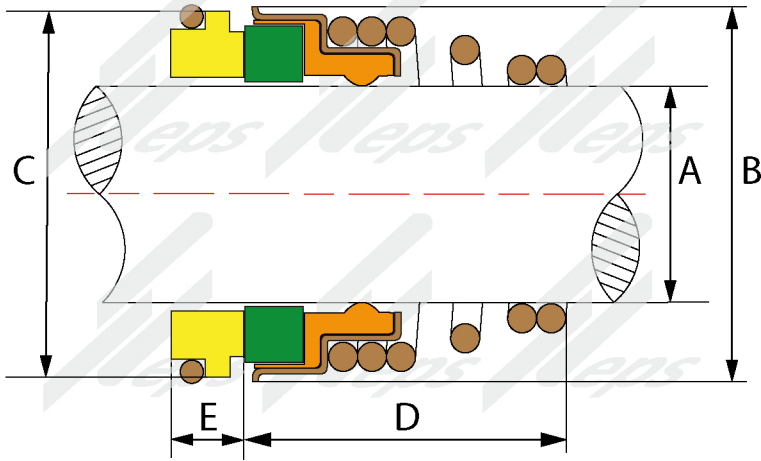

## Configuración:

- Rotativa: Carbón/Silicio
- Estacionaria: Cerámica/Silicio
- Elastomeros: Nitrilo/Viton
- Resorte y partes metálicas: Ac. inox. 304

## Medidas:

Sello Tipo 03					
Diam. de flecha A	B	C	D	E	Modelo.
10 mm	20.0	18.1	15	5.5	EPS0310S
12 mm	22.0	20.6	18	5.5	EPS0312S
13 mm	25.0	23.1	22	6.0	EPS0313S
14 mm	25.0	23.1	22	6.0	EPS0314S
15 mm	29.0	26.9	23	7.0	EPS0315S
16 mm	29.0	26.9	23	7.0	EPS0316S
17 mm	29.0	26.9	23	7.0	EPS0317S
18 mm	33.0	30.9	24	8.0	EPS0318S
20 mm	33.0	30.9	25	8.0	EPS0320S
22 mm	38.0	35.4	25	8.0	EPS0322S
22 mm	38.0	37.0	25	12.8	EPS0322SE
24 mm	38.0	35.4	25	8.0	EPS0324S
25 mm	40.0	38.2	27	8.5	EPS0325S

\*Medidas en mm

## Sello mecánico Tipo 03



## Aplicación:

- Sello mecánico para bombas centrífugas y perifericas de flecha milimétrica.
- Presión: 1.0Mpa, 145PSI
- Temperatura:  
Nitrilo: -20 a +120°C  
Viton: -30 a +210°C
- Velocidad: 15 m/s.

# EPS División sellos mecánicos

## Sello mecánico Tipo 03

### Continuación de medidas:

Sello Tipo 03					
Diam. de flecha A	B	C	D	E	Modelo
28 mm	46.0	43.3	30.0	9.0	EPS0328S
30 mm	46.0	43.3	30.0	9.0	EPS0330S
32 mm	46.0	43.3	30.0	9.0	EPS0332S
33 mm	50.0	53.5	39.0	11.5	EPS0333S
35 mm	50.0	53.5	39.0	11.5	EPS0335S
36 mm	50.0	53.5	39.0	13.5	EPS0338S
38 mm	60.5	60.5	39.0	13.5	EPS0338S
40 mm	60.5	60.5	39.0	13.5	EPS0340S

\*Medidas en mm

