


EPS División sellos mecánicos

Dibujo de sello: EPSARM02

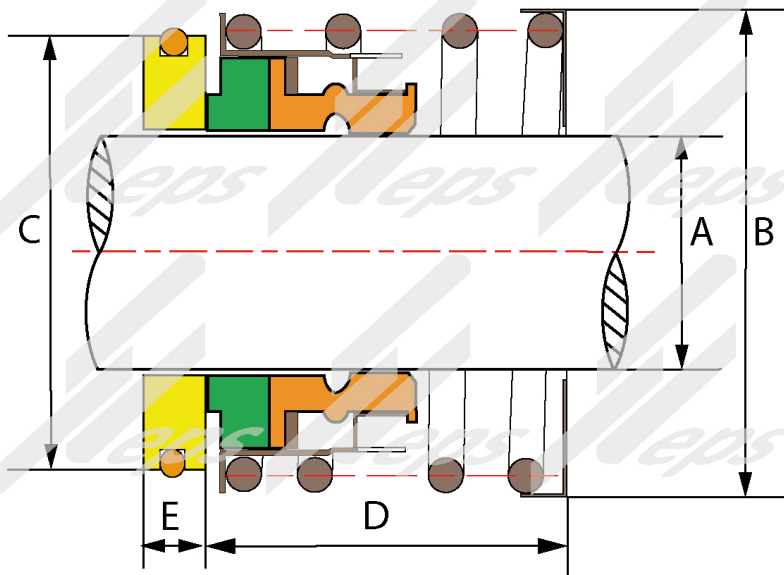

Configuración:

- Elastómeros: Nitrilo/Viton
- Resorte: SUS304
- Rotativa: Carbón/silicio
- Estacionaria: Cerámica/silicio

Medidas:

Sello EPSARM02						
Diam. de flecha A	B	C	D	E	F	Modelo
3/4"	40.0	27.8	25.0	10.3	7.0	EPSARM0234
1 1/8"	49.2	44.5	27.0	11.1	8.0	EPSARM02118
1 1/4"	52.4	47.6	27.0	11.1	10.5	EPSARM02114
1 5/8"	69.0	60.3	34.9	12.7	11.5	EPSARM02158
1 3/4"	69.9	63.5	34.9	12.7	11.5	EPSARM02134
2 1/8"	82.5	76.2	42.9	14.3	12.0	EPSARM02218

*Medidas en mm

Sello mecánico EPSARM02



Aplicación:

- Sello para adaptarse a bombas EPSARM02
- Presión: 2.8 Mpa, 406 Psi
- Vel: 13 m/seg.

